



- the original since 1922 -

TS454X Pneumatic Caulking Gun

Features:


*AntiDrip
Well Balanced Handle
One Hand Pressure Adjustment
Air Operated Return of Rod
Quick reloading*



Original Design & Manufacturing

Use:

Cartridge: Dual (2-Component)
Volume: 300+750ml
Viscosity: High (Epoxy)

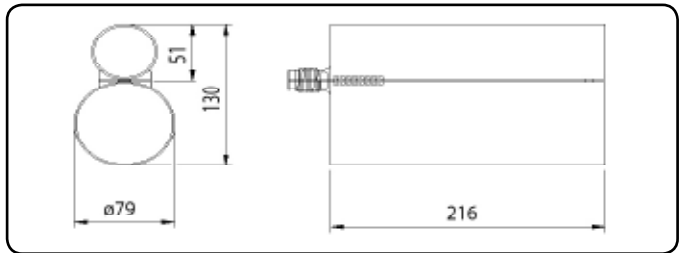

Web - Links: Technical drawing
(PDF) Maintenance

Description:

Professional
Reinforced Nylon Handle
Metal Cartridge Holder
Aluminium Air Cylinder

Technical data:

Weight: 2.93 kg
Length: 54.5 cm
Force: 4.0 kN ~400 kg
Air Supply: 8 bar (116 PSI)
Air Consumption: max 40 litres/min.

Variations:

Standard colour: Red/Grey

Packaging:

Packed individually

For customized versions please contact us

Krøger A/S - Geminivej 4-6 - DK-2670 Greve - Denmark - Phone: +45 43600111 - Fax: +45 43690137
www.mk-guns.dk - mail@mk-guns.dk

