

# HYDRA GRIP-O-MATIC®

Use with

2 & 3 Jaw Pullers  
6, 8, 11 & 30 Ton



PH82K



PH303C


PH63C

- You get the world's most copied puller design; the harder the pulling force, the tighter the jaws grip for secure holding force.
- Power Team pullers are tested for top performance and reliability at maximum capacity and jaw spread.
- Removing a wide variety of gears, bearings, bushings, pulleys and other press-fitted parts becomes a routine task.
- Easily metered release valve control knob.
- Spring loaded live centering cone.
- Bladder type oil reservoir.
- Rapid adjustment.
- Use with 2 or 3 jaws.
- Supplied with a sturdy storage/ carrying case.
- Features Power Team's exclusive Marathon Limited Lifetime Warranty

**Hydra Grip-O-Matic® pulling system** - These pullers are ideal for pulling a wide variety of press-fitted parts including bushings, bearings, wheels, gears and pulleys. Grip-O-Matic® pullers have been rigorously tested for top performance and reliability. PH82K is a complete pulling system which includes a hydraulic power module, 2-way puller head, jaws, legs and bearing splitter attachment; all contained in a convenient carrying case.



HST11S

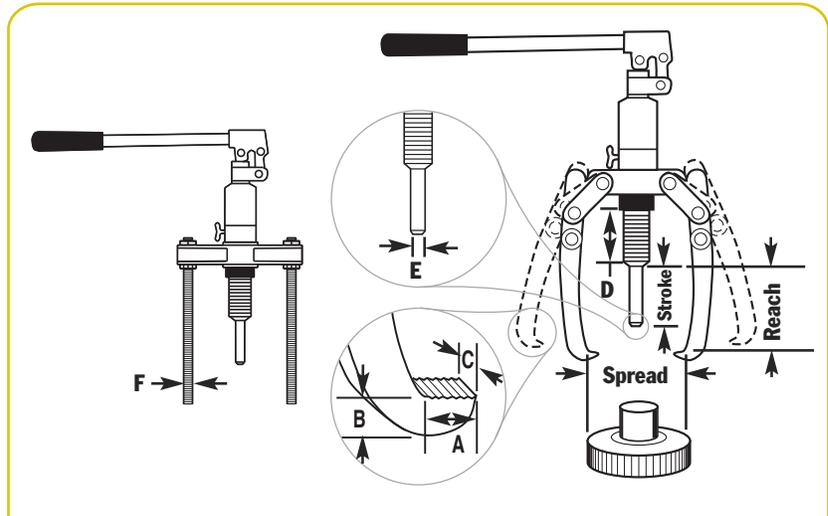

Cyl. Cap. (tons)	Order No.	Reach		Min. Reach (in.)	Max. Studs (in.)	Spread Jaws (in.)	Stroke (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	Wt. (lbs.)
		Studs (in.)	Jaws (in.)											
6	PH63C	—	6	—	—	7 <sup>7</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>8</sub>	7 <sup>7</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>4</sub>	7 <sup>7</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	7 <sup>7</sup> / <sub>8</sub>	—	10.8
8	PH83C	—	7 <sup>1</sup> / <sub>2</sub>	—	—	9 <sup>13</sup> / <sub>16</sub>	3 <sup>1</sup> / <sub>8</sub>	7 <sup>7</sup> / <sub>16</sub>	3 <sup>3</sup> / <sub>8</sub>	1	3 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>8</sub>	—	14.5
11	PH113C	—	9	—	—	11	3 <sup>1</sup> / <sub>8</sub>	9 <sup>9</sup> / <sub>16</sub>	3 <sup>3</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>8</sub>	—	17.6
30	PH303C	10 <sup>1</sup> / <sub>2</sub>	14 <sup>3</sup> / <sub>4</sub>	—	—	21 <sup>1</sup> / <sub>4</sub>	4 <sup>1</sup> / <sub>4</sub>	1 <sup>1</sup> / <sub>16</sub>	1 <sup>7</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>2</sub>	6 <sup>11</sup> / <sub>16</sub>	2 <sup>1</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub> -18 UNF	112
8	PH82K	10 <sup>1</sup> / <sub>2</sub>	8 <sup>5</sup> / <sub>32</sub>	4 <sup>29</sup> / <sub>32</sub>	11 <sup>51</sup> / <sub>64</sub>	9 <sup>21</sup> / <sub>32</sub>	3 <sup>1</sup> / <sub>8</sub>	2 <sup>3</sup> / <sub>64</sub>	1	5 <sup>5</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	7 <sup>7</sup> / <sub>8</sub>	5 <sup>5</sup> / <sub>8</sub> -18 UNF	35
11	HST11S*	—	5 <sup>29</sup> / <sub>32</sub>	—	—	16 <sup>1</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>8</sub>	—	—	—	3 <sup>1</sup> / <sub>4</sub>	7 <sup>7</sup> / <sub>8</sub>	—	32

\* (Max bar size 2.3622" or 60 mm)