


# PULLERS

## Hydraulic

5, 10, 17 1/2, 30 & 50 Ton

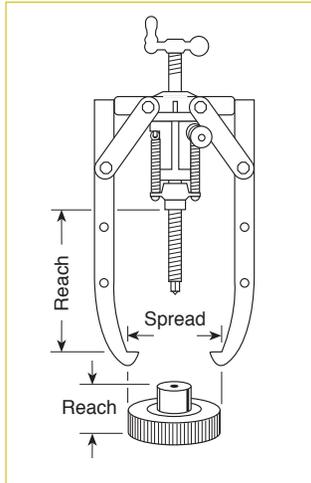

### 5 ton capacity, 2/3 jaw puller –

**No. PH53C** – Combination 2-jaw/3-jaw puller set. Includes 1057 5 ton puller, RPS55 hydraulic set (C55C cylinder, P12 10,000 psi hand pump, fittings, coupler, and 6 ft. hose), and 309874 pushing adapter. Wt., 20 lbs.

**No. PH53CR** – Combination 2-jaw/3-jaw puller set. Includes 1057 5 ton puller, C55C cylinder, and 309874 pushing adapter. Wt., 12 lbs.

**No. 1057** – 5 ton cap. 2-jaw/3-jaw puller only. Wt., 7.8 lbs.

### Available components -

**No. 309874** – 5/8" diameter pushing adapter. (Included with PH53C and PH53CR hydraulic puller sets.) Wt., 3 lb.

**No. 309875** – 7/8" diameter pushing adapter. Wt., .8 lb.

**No. 47997** – 2-way/3-way puller head. (Can be used to convert No. 1038 7 ton manual puller into a 5 ton hydraulic puller.) Wt., 2.3 lbs.

- Remove gears, bearings, and other press-fitted parts with speed and ease.
- Broad capacity range of 5, 10, 17 1/2, 30 and 50 tons.
- 5 and 10 ton sets include: single-acting, spring return hydraulic cylinder with hose, coupler and dust cap; single-speed hydraulic hand pump; puller.
- 17 1/2, 30 and 50 tons sets include: Power-Twin® single acting, spring return hydraulic cylinder with hose, coupler and dust cap; single-speed hydraulic hand pump; puller, adjusting screw and crank.
- Hydraulic cylinder of all models is readily removable from puller for use with pump in other hydraulic applications. You get maximum maintenance versatility for your investment.

Fed. Spec.: GGG-P-00781-D



### 10 ton capacity, 2/3 jaw puller -

**No. PH103C** – Combination 2-jaw/3-jaw puller; 10 ton capacity. Set includes 1060 10 ton puller, RPS1010 cylinder and pump set, 202179 threaded adapter, and 34602 pushing adapter. Wt., 52 lbs.

**No. PH103CR** – Combination 2-jaw/3-jaw puller, 10 ton capacity. Set includes 1060 10 ton puller, 202179 threaded adapter, 34602 pushing adapter, and C1010C cylinder only. (Pump and hose not included.) Wt., 32 lbs.

**No. 1060** – Combination 2-jaw/3-jaw puller only; 10 ton capacity. (Cylinder and pump set, hose, coupler, and adapter No. 202179 not included.) Wt., 17 lbs.

**NOTE:** This puller may be used with any 10 ton single-acting cylinder having a 2 1/4"-14 straight collar thread.





**17½ ton capacity, 2-jaw puller –**

**No. PH172** – 2-jaw puller with RT172 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 6-ft. hose, hose half coupler, 1"– 8 x 20" long adjusting screw, and adjusting crank. Wt., 61 lbs.

**No. 1064** – Puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 22 lbs.

**17½ ton capacity, 3-jaw puller –**

**No. PH173** – 3-jaw puller with RT172 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 6-ft. hose, hose half coupler, 1"– 8 x 20" long adjusting screw, and adjusting crank. Wt., 75 lbs.

**No. PH173R** – 3-jaw puller with screw and crank, and RT172 center-hole twin cylinder. Wt., 56 lbs.

**No. 1066** – Puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 36 lbs.

**30 ton capacity, 3-jaw puller –**

**No. PH303** – 3-jaw puller with RT302 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 6-ft. hose, hose half coupler, 1¼"– 7 x 24" lg. adjusting screw, and adjusting crank. Wt., 149 lbs.

**No. PH303R** – 3-jaw puller with screw and crank, and RT302 center-hole twin cylinder. Wt., 130 lbs.

**No. 1074** – Puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 90 lbs.

**50 ton capacity, 3-jaw puller –**

**No. PH503** – 3-jaw puller with RT503 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 6-ft. hose, hose half coupler, 1⅝"– 5½ x 30⅜" long adjusting screw, and adjusting crank. Wt., 286 lbs.

**No. 1080** – 3-jaw puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 191 lbs.

**PULLER ONLY**

Order No.	Cap. (Tons)	Jaws	Jaw Reach (in.)	Jaw Spread (in.)	Jaw Thickness (in.)	Jaw Width (in.)	Wt. (lbs.)
1057	5	2/3	8¾	11½	11/32	63/64	7.8
1060	10	2/3	15	17	9/16	63/64	17
1064	17½	2	11½	16	13/16	19/32	22
1066	17½	3	11½	20	13/16	19/32	36
1074	30	3	19⅞	34	1⅛	1⅝	90
1080	50	3	27⅝	44	1⅜	1⅞	191

**CAUTION:** Always use a 3-jaw puller where clearance permits in order to provide a more stable setup and a more even pulling force.

